



Warrington Certification Ltd
Holmesfield Road
Warrington
WA1 2DS
United Kingdom

T : +44 (0) 1925 646 669
W: www.warringtoncertification.com
E: etass@exova.com



Member of
www.eota.eu

European Technical Assessment

ETA 14/0378
of 7/10/14

Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No 305/2011:	
Trade name of the construction product	fischer FiAM Intumescent Acoustic Mastic
Product family to which the construction product belongs	Fire Stopping and Sealing Product Penetration Seals
Manufacturer	Fischerwerke GmbH & Co Weinhalde 14-18 72178 Waldachtal Germany
Manufacturing plant(s)	E/091
This European Technical Assessment contains	15 pages including 3 Annex(es) which form an integral part of this assessment.
	Annex(es) A - C Contain(s) confidential information and is/are not included in the European Technical Assessment when that assessment is publicly available.
This European Technical Assessment is issued in accordance with regulation (EU) No 305/2011, on the basis of	ETAG 026, edition 2011, used as European Assessment Document (EAD)

General Comments

1. This European Technical Assessment is issued by Warrington Certification Limited on the basis of ETAG 026 Fire Protective Products Part 1: General June 2013, and Part 2: Fire Stopping and Fire Sealing Products Aug 2011, Used as European Assessment Document.
2. This European Technical Assessment is not to be transferred to manufacturers or agents of manufacturers other than those indicated on page 1, or manufacturing plants other than those indicated on page 1.



1 SPECIFIC CONDITIONS OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical Description of the Product

(Detailed information and data are given in Annexes)

- 1) fischer FiAM Intumescent Acoustic Mastic is an acrylic based material, used to reinstate the fire resistance performance of wall and floor constructions where they have been provided with apertures for the penetrations of multiple services.
- 2) fischer FiAM Intumescent Acoustic Mastic has slight intumescent properties that cause it to swell on heating.
- 3) Certain seals require the use of fischer Thermal Defense Wrap is used to insulate the service. The Defense Wrap is a 6mm thick foil faced ceramic based insulation material and is utilised externally to the fischer FiAM Intumescent Acoustic Mastic. See Annex C.
- 4) Certain seals require backfilling with mineral fiber 70mm thick, with a density of 80Kg/m³. See Annex C.
- 5) The fischer FiAM Intumescent Acoustic Mastic is supplied in liquid form contained within 310 ml & 380ml cartridges, 600ml foils or in 5, 10, 20 or 25 litre tubs. The sealant is gunned or trowelled into the aperture in or between the separating element/elements to a specified depth utilising various backing materials.

Internal use- ETAG 026-3 (used as European Assessment Document EAD) Type Z₁.

2 Specification Of The Intended Use In Accordance With The Relevant EAD

2.1 Intended Use

The intended use of fischer FiAM Intumescent Acoustic Mastic is to reinstate the fire resistance performance of rigid and flexible wall constructions where they are penetrated by various cables and metallic pipes

- 1) The specific elements of construction that the system fischer FiAM Intumescent Acoustic Mastic may be used to provide a penetration seal in, are as follows:

Rigid walls: The wall must have a minimum thickness of 150 mm and comprise concrete, aerated concrete or masonry, with a minimum density of 650 kg/m³.

Flexible walls The wall must have a minimum thickness of 120 mm and comprise timber or steel studs lined on both faces with minimum 2 layers of 12.5 mm thick, 'Type F' Gypsum boards according to EN 520. In timber stud walls, no part of the penetration shall be closer than 100 mm to a stud, the cavity must be closed between the penetration seal and the stud and minimum 100 mm of insulation of class A1 or A2 according to EN 13501-1, is provided within the cavity between the penetration seal and the stud.

The supporting construction must be classified in accordance with EN 13501-2 for the required fire resistance period.



- 2) The fischer FiAM Intumescent Acoustic Mastic may be used to provide a penetration seal with pipes and cables (for details see Annex C).
- 3) The total amount of cross sections of services (including insulation) should not exceed 60% of the penetration area.
- 4) The system fischer FiAM Intumescent Acoustic Mastic may be used to seal apertures in the separating element up to 496mm wide by 100mm high dependant on the configuration. The minimum permitted separation between adjacent seals/apertures is 200mm.
- 5) Pipes must be installed singular, cables require no minimum separation.
- 6) Services in floors shall be supported at maximum 150mm from the face of the separating element.
- 7) The provisions made in this European Technical Assessment are based on an assumed working life of the fischer FiAM Intumescent Acoustic Mastic of 10 years, provided that the conditions laid down in sections 4.2/5.1/5.2 for the packaging/transport/storage/installation/use/repair are met. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

2.2 Use Category

Type Z₁: Intended for use in internal conditions with humidity equal to or higher than 85% RH excluding temperatures below 0°C, without exposure to rain or UV.



3 Performance Of The Product And References To The Methods Used For Its Assessment

The assessment of fitness for use has been made in accordance with EOTA ETAG 026 Part 2: 2011-08-08 (used as European Assessment Document, EAD)

ETAG Clause No.	ETA Clause No.	Characteristic	Assessment of characteristic
		Mechanical resistance and stability	Not relevant
		Safety in case of fire	See Clause 2.1
2.4.1	3.1	Reaction to fire	Class F according to EN 13501-1
2.4.2	3.2	Resistance to fire	See clause 2.2 & Annex C
		Hygiene, Health and the Environment	
2.4.3	3.3	Air permeability	See clause 2.3
2.4.4	3.4	Water permeability	No performance determined
2.4.5	3.5	Dangerous substances	See clause 2.5
		Safety in use	
2.4.6	3.6	Mechanical resistance and stability	No performance determined
2.4.7	3.7	Resistance to impact/movement	No performance determined
2.4.8	3.8	Adhesion	No performance determined
		Protection against noise	No performance determined
2.4.9	3.9	Airborne sound insulation	R_w (C_i;C_{tr})= 38(-2;-7)
		Energy, Economy and Heat Retention	
2.4.10	3.10	Thermal properties	No performance determined
2.4.11	3.11	Water vapour permeability	No performance determined
		General aspects relating to fitness for use	
2.4.12	3.12	Durability and serviceability	Z₁

3.1 Reaction to fire

System fischer FiAM Intumescent Acoustic Mastic is classified 'F' in accordance with EN 13501-1.

3.2 Resistance to fire

System fischer FiAM Intumescent Acoustic Mastic has been tested in accordance with BS EN 1366-3: 2009 based upon the test results and the field of direct application specified within EN 1366-3: 2009, the system fischer FiAM Intumescent Acoustic Mastic has been classified in accordance with EN 13501-2, as given in Annex C:



The seals may only be penetrated by the services described in Annex C; other parts or support constructions must not penetrate the seal.

The service support construction must be fixed to the building element containing the penetration seal or a suitable adjacent building element, in such a manner that in the case of fire, no additional load is imposed on the seal. Furthermore it is assumed that the unexposed face support is maintained for the required period of fire resistance.

Certain pipe configurations should be insulated with minimum 300mm long, 6mm thick Thermal Defence Wrap. See Annex C

Pipes must be perpendicular to the seal surface.

It is assumed that compressed air systems are switched off by other means in the case of fire.

The function of the pipe seal in case of pneumatic dispatch systems, pressurised air systems etc. is guaranteed only when the systems are shut off in case of fire.

The assessment does not cover the avoidance of destruction of the seal or of the abutting building element(s) by forces caused by temperature changes in case of fire. This has to be considered when designing the piping system.

The approval does not address any risks associated with leakage of dangerous liquids or gases caused by failure of the pipe(s) in case of fire.

The durability assessment does not take account of the possible effect of substances permeating through the pipe on the penetration seal.

3.3 Air permeability

System Fischer FiAM Intumescent Acoustic Mastic has been tested in accordance with BS EN 1314-1 to provide the following results:

Product tested				
Pressure (Pa)	Results under positive chamber pressure		Results under negative chamber pressure	
	Leakage (m ³ /h)	Leakage (m ³ /m ² /h)	Leakage (m ³ /h)	Leakage (m ³ /m ² /h)
50	0.0	0.0	0.0	0.0
100	0.0	0.0	0.0	0.0
150	0.0	0.0	0.1	2.8
200	0.0	0.0	0.1	2.8
250	0.0	0.0	0.1	2.8
300	0.0	0.0	0.0	0.0
450	0.1	2.8	0.1	2.8
600	0.1	2.8	0.1	2.8

3.4 Water permeability

No performance determined



3.5 Dangerous substances

Fischerwerke GmbH & Co has presented a declaration that fischer FiAM Intumescent Acoustic Mastic does not contain any substance of high concern with regards to REACH Regulations and are compliant with the requirements reference to <http://ec.europa.eu/enterprise/construction/cpd-ds/index.cfm>

Confirmation has further been declared that all dangerous chemical substances ≥ 1.0 % w/w as well as all toxic, carcinogenic, toxic for reproduction and mutagenic chemical substances ≥ 0.1 % w/w (Status: 29. adaption – 2004/73/EG – of the EU directive 67/548/EEC - classification, packaging and labeling of dangerous substances) are stated in the fischer FiAM Intumescent Acoustic Mastic safety data sheets (according to 91/155/EEC including amendments) and have been considered for the classification of the products according to the directive 1999/45/EG (classification of preparations, including amendments).

All dangerous chemical substances are below the classification limits of 67/548/EEC.

In addition to the specific clauses relating to dangerous substances contained in this European technical approval, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products Regulation, these requirements need also to be complied with, when and where they apply.

3.6 Mechanical resistance and stability

No performance determined.

3.7 Resistance to impact/movement

No performance determined.

3.8 Adhesion

Not relevant.

3.9 Airborne sound insulation

The results of the test provided the following single number rating:

R_w (C;Ctr)= 38(-2;-7)

3.10 Thermal Properties

No performance determined.

3.11 Water vapour permeability

No performance determined.



3.12 Durability and serviceability

fischer FiAM Intumescent Acoustic Mastic has been tested in accordance with EOTA Technical Report - TR024 – Edition November 2006, for the type Z₁ use category specified in ETAG 026-3 (used as European Assessment Document, EAD), and the results of the tests have demonstrated suitability for penetration seals intended for use in internal conditions with humidity equal to or higher than 85% RH excluding temperatures below 0°C, without exposure to rain or UV.

4 Assessment And Verification Of Constancy Of Performance (Hereinafter AVCP) System Applied, With References To Its Legal base

According to the decision 1999/454/EC of the European Commission the system of assessment and verification of constancy of performance (see Annex V to the Regulation (EU) No 305/2011) given in the following table apply:

Products	Intended uses	Level or Class	System
Fire stopping and fire sealing products	For fire compartmentation and / or fire protection or fire performance	Any	System 1



5. Technical Details Necessary For The Implementation Of The AVCP System, As Provided For In The Applicable EAD.

Tasks for the Manufacturer

Factory production control

The manufacturer shall exercise permanent internal control of production. All the elements, requirements and provisions adopted by the manufacturer shall be documented in a systematic manner in the form of written policies and procedures, including records of results performed. This production control system shall ensure that the product is in conformity with this European technical assessment.

The manufacturer may only use constituent materials stated in the technical documentation of this European technical assessment.

The factory production control shall be in accordance with the Control Plan of 4.10.13 relating to the European technical assessment ETA 14/0378 which is part of the technical documentation of this European technical assessment. The "Control Plan" is laid down in the context of the factory production control system operated by the manufacturer and deposited at Warrington Certification Limited.

The results of factory production control shall be recorded and evaluated in accordance with the provisions of the Control Plan.

Other tasks of manufacturer

Additional information

The manufacturer shall provide a technical data sheet and an installation instruction with the following minimum information:

(a) Technical data sheet:

- Field of application:
 - Building elements for which the penetration seal is suitable, type and properties of the building elements like minimum thickness, density, and - in case of lightweight constructions – the construction requirements.
 - Services for which the penetration seal is suitable, type and properties of the services like material, diameter, thickness etc. in case of pipes including insulation materials; necessary/allowed supports/fixings (e.g. cable trays)
 - Limits in size, minimum thickness etc. of the penetration seal
 - Construction of the penetration seal including the necessary components and additional products (e.g. backfilling material) with clear indication whether they are generic or specific.
- (a) Construction of the penetration seal including the necessary components and additional products (e.g. backfilling material) with clear indication whether they are generic or specific.



(b) Installation instruction:

- Steps to be followed
- Procedure in case of retrofitting.

Tasks of approved bodies

The approved body shall perform the

- initial type-testing of the product,
- initial inspection of factory and of factory production control,
- continuous surveillance, assessment and approval of factory production control,

In accordance with the provisions laid down in the " Control Plan" of 4.10.13 relating to the European Technical Assessment 14/0378.

The approved body shall retain the essential points of its actions referred to above and state the results obtained and conclusions drawn in a written report.

The approved certification body involved by the manufacturer shall issue an EC certificate of conformity of the product stating the conformity with the provisions of this European technical assessment.

In cases where the provisions of the European technical assessment and its "Control Plan" are no longer fulfilled the certification body shall withdraw the certificate of conformity and inform the Warrington Certification Limited without delay.



Signatories



Responsible Officer

C. Abbott* - Principal Certification Engineer



Approved

A. Kearns* - Technical Manager

* For and on behalf of Warrington Certification Limited.



Annex A

Reference Documents and LIST OF ABBREVIATIONS

References to standards mentioned in the ETA:

EN 13501-1	Fire classification of construction products and building elements – Part 1: Classification using test data from reaction to fire tests
EN 13501-2	Fire classification of construction products and building elements – Part 2: Classification using test data from fire resistance tests

Other reference documents:

EOTA TR 024	Characterisation, Aspects of Durability and Factory Production Control for Reactive Materials, Components and Products
ETAG No. 026: Part 2	Guideline For European Technical Approval of Fire Stopping and Fire Sealing Products, Part 3: Penetration Seals(used as European Assessment Document, EAD)




Annex B

Description of Product and Product Literature


fischer FiAM Intumescent Acoustic Mastic

A detailed specification of the product is contained in document "Evaluation Report" relating to the European Technical Approval ETA – 14/0378 issued on 7/10/14, of fischer FiAM Intumescent Acoustic Mastic which is a non-public part of this ETA.



Intumescent Acoustic Mastic - FIA M

Overview

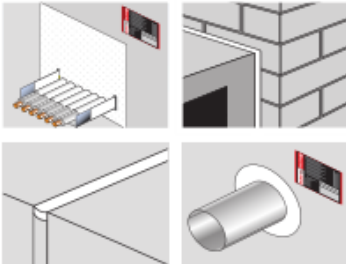


Application examples:
 Metallic services-Steel / Cast Iron pipes
 General construction joints - wall / floor / head of wal
 Drywall partitions - connections
 FCPS Coated panel system joints

Approved to:


British Standard
 BS 476 - 20
 BS EN 1366-3
 BS EN 1366-4
 BS EN ISO 140-3:1995

American Standard
 ASTM E 1966
 (UL 2079)



CLASSIFIED
C UL US

FILL VOID OR CAVITY MATERIAL FOR USE IN THROUGH PENETRATIONS FIRE STOP SYSTEMS. SEE UL DIRECTORY OF PRODUCTS CERTIFIED FOR CLASSIFICATION AND UL FIRE RESISTANCE DIRECTORY ANSI.




Approved CF 5034


Application area:

- Construction joints
- Metallic services
- FCPS Coated panel system joints

Product Description

 **Features / uses**

Water based
 Low VOC
 Movement capability ± 10%
 Excellent acoustic properties
 Approved for infinite linear gap length
 Halogen & solvent free
 Paintable



fischer FiAM is a one part water based intumescent acrylic mastic that can provide up to 5 hours fire resistance when used in construction joints and services in both vertical and horizontal applications.

Tested to BS EN1366-4, BS 476 and BS EN ISO 717-1:1997 the FiAM is also classified to ISO 11600. Formulated to be halogen and solvent free the FiAM exhibits excellent slump characteristics and has been designed to maintain the sound reduction index of a structure.

Tested with a variety of materials, suitable compatibility in timber, steel, concrete, drywall and brick/block work, and can also be use with the FCPS Coated Panel System.

Technical Data

Chemical Base:	Water-Based Acrylic
Density:	approx 1.6 g/cm ³
Skin-forming time:	approx 10 min. at 23°C RH
Curing rate:	approx 1.5 mm per 24 hours*
Storage temperature:	+5°C to +25°C
Movement capability:	± 15%
Slump:	Nil up to 20mm
Shelf-life:	18 months (under recommended conditions)
pH Value:	8 - 9.5
Sound transmission class: (dB)	38
Yield per l/m:	1.55 l/m**
Colour	White, Grey, Brown




Annex C

Resistance to Fire Classification of fischer FiAM Intumescent Acoustic Mastic

C.1.1 Flexible and Rigid wall constructions according to 1.2.1 with wall thickness of minimum 120 mm

C.1.2 Penetration seal with fischer FiAM Intumescent Acoustic Mastic installed flush with both faces of wall

Construction details: Metallic pipes (insulated and un-insulated) penetrating through the wall construction. 25mm off fischer FiAM Intumescent Acoustic Mastic applied flush with both faces of the wall.

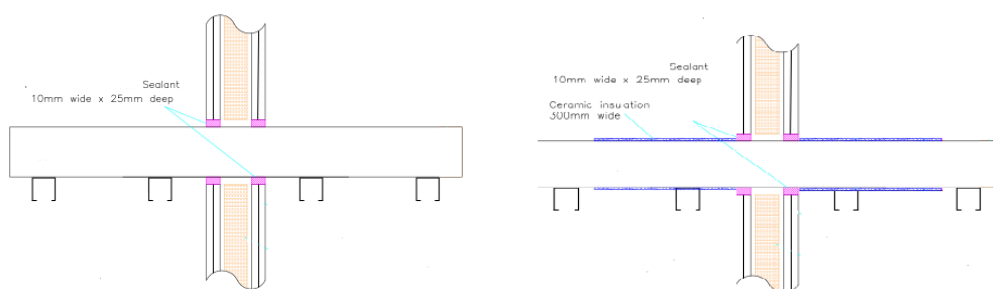

C.1.3


fischer FiAM Intumescent Acoustic Sealant Penetration Seals. Min 120 mm Thick Flexible or Rigid Wall.			
Penetration Specification	fischer FiAM Intumescent Acoustic Mastic (installed both faces)	Backing Material	Classification
Copper/Steel Pipe 15mm \varnothing , 0.8mm – 7.4mm wall thickness	10mm annulus x 25mm deep	N/A	E120 C/U EI20 C/U
Copper/Steel Pipe 40mm \varnothing , 0.8mm – 14.2mm wall thickness	10mm annulus x 25mm deep	N/A	E120 C/U EI15 C/U
Copper/Steel Pipe 40-159mm \varnothing , 1.8mm – 14.2mm wall thickness	10mm annulus x 25mm deep	N/A	E120 C/U
Copper/Steel Pipe 40mm \varnothing , 0.8mm – 14.2mm wall thickness*	10mm annulus x 25mm deep	N/A	E120 C/U EI90 C/U
Copper/Steel Pipe 40-159mm \varnothing , 1.8mm – 14.2mm wall thickness*	10mm annulus x 25mm deep	N/A	E120 C/U EI20 C/U

* Thermal defence wrap to the unexposed face 300mm long



C.2 Flexible and Rigid wall constructions according to 1.2.1 with wall thickness of minimum 120 mm

C.2.2 Penetration seal with fischer FiAM Intumescent Acoustic Mastic installed flush to both faces of wall

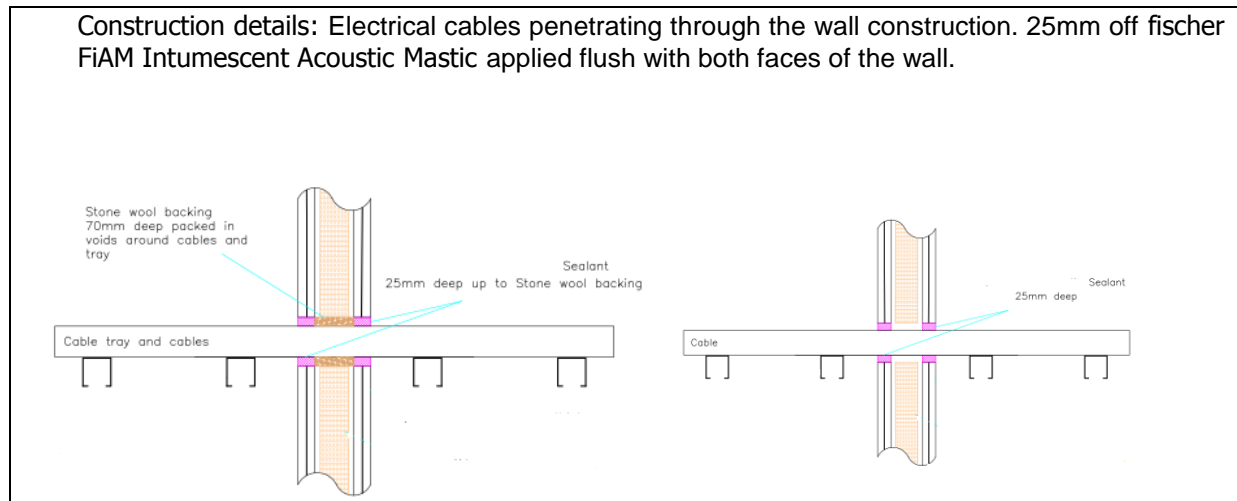

C.2.3

fischer FiAM Intumescent Acoustic Mastic Penetration Seals. Min 120 mm Thick Flexible or Rigid Wall.

Penetration Specification	fischer FiAM Intumescent Acoustic Mastic (installed both faces)	Backing Material	Classification
Cables up to 21mm	490mm long x 100mm high x 25mm deep	70mm thick, 80Kg/m ³	E120 EI90
Perforated Cable Tray 450mm x 50mm			
Cables up to 21-50mm	200mm long x 100mm high x 25mm deep	N/A	E90 EI60

